


AUPO 'F' 溫度保險絲規格表

A-F 系列

型號 Model No.	額定動作溫度 Rated functioning temp. (Tf)	實測動作溫度 Fusing-off temperature (°C)	保持溫度 Holding temperature (Th)	極限溫度 Maximum temp. limit (Tm)	額定電流 Rated current (Ir)	額定電壓 Rated voltage (Ur)	安規認證 Safety approval						
							UL	CSA	CUL	TUV	VDE	PSE	CCC
A1-F	102°C	98+/-2°C	79°C	203°C	2A	250Vac	●	●	●	●	●	●	●
A2-F	115°C	112+/-3°C	92°C	203°C	2A	250Vac	●	●	●	●	●	●	●
A3-F	125°C	120+/-3°C	101°C	203°C	2A	250Vac	●	●	●	●	●	●	●
A4-F	130°C	126+/-2°C	107°C	203°C	2A	250Vac	●	●	●	●	●	●	●
A5-F	135°C	131+/-3°C	112°C	203°C	2A	250Vac	●		●	●	●	●	●
A7-F	138°C	135+/-2°C	115°C	203°C	2A	250Vac	●		●	●	●	●	●
A8-F	150°C	145+/-3°C	126°C	203°C	2A	250Vac	●		●	●	●	●	●
A12-F	145°C	140+/-2°C	120°C	203°C	2A	250Vac				●	●	●	●

Dimension (A-F series)

a	b	c	d	e
6.2±0.5	6.3±0.5	2.5±0.3	∅0.54±0.02	70±3

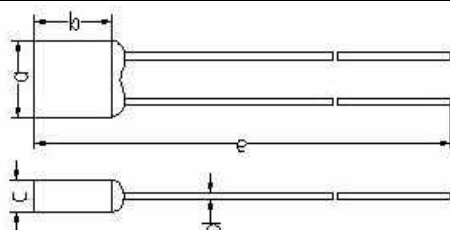


A-1A-F 系列

型號 Model No.	額定動作溫度 Rated functioning temp. (Tf)	實測動作溫度 Fusing-off temperature (°C)	保持溫度 Holding temperature (Th)	極限溫度 Maximum temp. limit (Tm)	額定電流 Rated current (Ir)	額定電壓 Rated voltage (Ur)	安規認證 Safety approval						
							UL	CSA	CUL	TUV	VDE	PSE	CCC
A1-1A-F	102°C	98+/-2°C	76°C	180°C	1A	250Vac	●		●		●	●	●
A2-1A-F	115°C	112+/-3°C	85°C	180°C	1A	250Vac	●		●		●	●	●
A3-1A-F	125°C	120+/-3°C	97°C	180°C	1A	250Vac	●		●		●	●	●
A4-1A-F	130°C	126+/-2°C	102°C	180°C	1A	250Vac	●		●		●	●	●
A5-1A-F	135°C	131+/-3°C	105°C	180°C	1A	250Vac	●		●		●	●	●
A7-1A-F	138°C	135+/-2°C	108°C	180°C	1A	250Vac	●		●		●	●	●
A8-1A-F	150°C	145+/-3°C	120°C	180°C	1A	250Vac	●		●		●	●	●
A12-1A-F	145°C	140+/-2°C	120°C	180°C	1A	250Vac					●	●	●

Dimension (A-1A-F series)

a	b	c	d	e
5.2±0.5	4.0±0.5	2.3±0.2	∅0.54±0.02	70±3

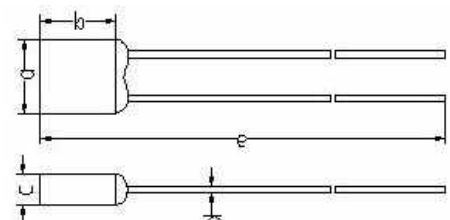


A-3A-F 系列

型號 Model No.	額定動作溫度 Rated functioning temp. (Tf)	實測動作溫度 Fusing-off temperature (°C)	保持溫度 Holding temperature (Th)	極限溫度 Maximum temp. limit (Tm)	額定電流 Rated current (Ir)	額定電壓 Rated voltage (Ur)	安規認證 Safety approval						
							UL	CSA	CUL	TUV	VDE	PSE	CCC
A0-3A-F	84°C	82+/-2°C	40°C	180°C	3A	250Vac	●		●		●	●	●
A1-3A-F	102°C	98+/-2°C	63°C	180°C	3A	250Vac	●		●		●	●	●
A2-3A-F	115°C	112+/-3°C	75°C	180°C	3A	250Vac	●		●		●	●	●
A3-3A-F	125°C	120+/-3°C	85°C	180°C	3A	250Vac	●		●		●	●	●
A4-3A-F	130°C	126+/-2°C	90°C	180°C	3A	250Vac	●		●		●	●	●
A5-3A-F	135°C	131+/-3°C	90°C	180°C	3A	250Vac	●		●		●	●	●
A7-3A-F	138°C	135+/-2°C	93°C	180°C	3A	250Vac	●		●		●	●	●
A8-3A-F	150°C	145+/-3°C	105°C	180°C	3A	250Vac	●		●		●	●	●
A12-3A-F	145°C	140+/-2°C	102°C	180°C	3A	250Vac					●	●	

Dimension (A-3A-F series)

a	b	c	d	e
6.2±0.5	6.3±0.5	2.5±0.3	∅0.6±0.02	70±3

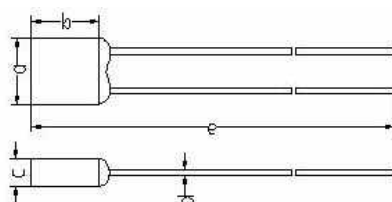


A-5A-F 系列

型號 Model No.	額定動作溫度 Rated functioning temp. (Tf)	實測動作溫度 Fusing-off temperature (°C)	保持溫度 Holding temperature (Th)	極限溫度 Maximum temp. limit (Tm)	額定電流 Rated current (Ir)	額定電壓 Rated voltage (Ur)	安規認證 Safety approval						
							UL	CSA	CUL	TUV	VDE	PSE	CCC
A0-5A-F	84°C	82+/-2°C	40°C	180°C	5A	250Vac	●		●		●	●	●
A1-5A-F	102°C	98+/-2°C	63°C	180°C	5A	250Vac	●		●		●	●	●
A2-5A-F	115°C	112+/-3°C	75°C	180°C	5A	250Vac	●		●		●	●	●
A3-5A-F	125°C	120+/-3°C	85°C	180°C	5A	250Vac	●		●		●	●	●
A4-5A-F	130°C	126+/-2°C	90°C	180°C	5A	250Vac	●		●		●	●	●
A5-5A-F	135°C	131+/-3°C	90°C	180°C	5A	250Vac	●		●		●	●	●
A7-5A-F	138°C	135+/-2°C	93°C	180°C	5A	250Vac	●		●		●	●	●
A8-5A-F	150°C	145+/-3°C	105°C	180°C	5A	250Vac	●		●		●	●	●
A12-5A-F	145°C	140+/-2°C	102°C	180°C	5A	250Vac					●	●	●

Dimension (A-5A-F series)

a	b	c	d	e
6.6±0.5	8.0±0.5	2.6±0.3	∅0.6±0.02	70±3

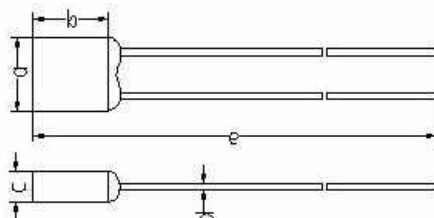


P-F 系列

型號 Model No.	額定動作溫度 Rated functioning temp. (Tf)	實測動作溫度 Fusing-off temperature (°C)	保持溫度 Holding temperature (Th)	極限溫度 Maximum temp. limit (Tm)	額定電流 Rated current (Ir)	額定電壓 Rated voltage (Ur)	安規認證 Safety approval						
							UL	CSA	CUL	TUV	VDE	PSE	CCC
P1-F	102°C	98+/-2°C	76°C	180°C	2A	250Vac	●		●	●	●	●	●
P2-F	115°C	112+/-3°C	85°C	180°C	2A	250Vac	●		●	●	●	●	●
P3-F	125°C	120+/-3°C	97°C	180°C	2A	250Vac	●		●	●	●	●	●
P4-F	130°C	126+/-2°C	102°C	180°C	2A	250Vac	●		●	●	●	●	●
P5-F	135°C	131+/-3°C	105°C	180°C	2A	250Vac	●		●	●	●	●	●
P9-F	138°C	135+/-2°C	108°C	180°C	2A	250Vac	●		●	●	●	●	●
P7-F	150°C	145+/-3°C	120°C	180°C	2A	250Vac	●		●	●	●	●	●
P12-F	145°C	140+/-2°C	120°C	180°C	2A	250Vac				●	●	●	

Dimension (P-F series)

a	b	c	d	e
9.0±0.5	38±3	Φ0.53±0.02	Φ2.5±0.1	3.0 or below

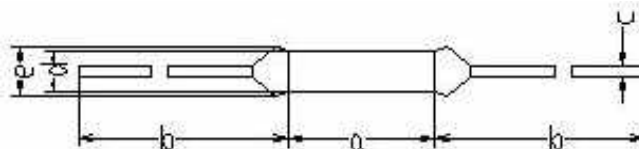


P-1A-F 系列

型號 Model No.	額定動作溫度 Rated functioning temp. (Tf)	實測動作溫度 Fusing-off temperature (°C)	保持溫度 Holding temperature (Th)	極限溫度 Maximum temp. limit (Tm)	額定電流 Rated current (Ir)	額定電壓 Rated voltage (Ur)	安規認證 Safety approval						
							UL	CSA	CUL	TUV	VDE	PSE	CCC
P1-1A-F	102°C	98+/-2°C	76°C	180°C	1A	250Vac	●	●	●		●	●	●
P2-1A-F	115°C	112+/-3°C	85°C	180°C	1A	250Vac	●	●	●		●	●	●
P3-1A-F	125°C	120+/-3°C	97°C	180°C	1A	250Vac	●	●	●		●	●	●
P4-1A-F	130°C	126+/-2°C	102°C	180°C	1A	250Vac	●	●	●		●	●	●
P5-1A-F	135°C	131+/-3°C	105°C	180°C	1A	250Vac	●	●	●		●	●	●
P9-1A-F	138°C	135+/-2°C	108°C	180°C	1A	250Vac	●	●	●		●	●	●
P7-1A-F	150°C	145+/-3°C	120°C	180°C	1A	250Vac	●	●	●		●	●	●
P10-1A-F	117°C	113+/-3°C	88°C	180°C	1A	250Vac	●	●	●		●	●	●
P12-1A-F	145°C	140+/-2°C	120°C	180°C	1A	250Vac		●			●	●	

Dimension (P-1A-F series)

a	b	c	d	e
6.5±0.5	38±3	Φ0.53±0.02	Φ2.1±0.1	2.4 or below

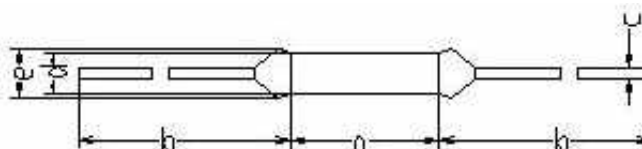


P-3A-F 系列

型號 Model No.	額定動作溫度 Rated functioning temp. (Tf)	實測動作溫度 Fusing-off temperature (°C)	保持溫度 Holding temperature (Th)	極限溫度 Maximum temp. limit (Tm)	額定電流 Rated current (Ir)	額定電壓 Rated voltage (Ur)	安規認證 Safety approval						
							UL	CSA	CUL	TUV	VDE	PSE	CCC
P0-3A-F	84°C	82+/-2°C	55°C	180°C	3A	250Vac	●		●		●	●	●
P1-3A-F	102°C	98+/-2°C	63°C	180°C	3A	250Vac	●		●		●	●	●
P2-3A-F	115°C	112+/-3°C	75°C	180°C	3A	250Vac	●		●		●	●	●
P3-3A-F	125°C	120+/-3°C	85°C	180°C	3A	250Vac	●		●		●	●	●
P4-3A-F	130°C	126+/-2°C	90°C	180°C	3A	250Vac	●		●		●	●	●
P5-3A-F	135°C	131+/-3°C	90°C	180°C	3A	250Vac	●		●		●	●	●
P9-3A-F	138°C	135+/-2°C	95°C	180°C	3A	250Vac	●		●		●	●	●
P7-3A-F	150°C	145+/-3°C	105°C	180°C	3A	250Vac	●		●		●	●	●
P12-3A-F	145°C	140+/-2°C	102°C	180°C	3A	250Vac					●	●	

Dimension (P-3A-F series)

a	b	c	d	e
10.0±0.5	38±3	0.6±0.02	3.0±0.1	3.3 or below

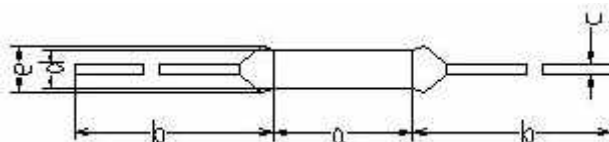


P-5A-F 系列

型號 Model No.	額定動作溫度 Rated functioning temp. (Tf)	實測動作溫度 Fusing-off temperature (°C)	保持溫度 Holding temperature (Th)	極限溫度 Maximum temp. limit (Tm)	額定電流 Rated current (Ir)	額定電壓 Rated voltage (Ur)	安規認證 Safety approval						
							UL	CSA	CUL	TUV	VDE	PSE	CCC
P0-5A-F	84°C	82+/-2°C	55°C	180°C	5A	250Vac	●		●		●	●	●
P1-5A-F	102°C	98+/-2°C	63°C	180°C	5A	250Vac	●		●		●	●	●
P2-5A-F	115°C	112+/-3°C	75°C	180°C	5A	250Vac	●		●		●	●	●
P3-5A-F	125°C	120+/-3°C	85°C	180°C	5A	250Vac	●		●		●	●	●
P4-5A-F	130°C	126+/-2°C	90°C	180°C	5A	250Vac	●		●		●	●	●
P5-5A-F	135°C	131+/-3°C	90°C	180°C	5A	250Vac	●		●		●	●	●
P9-5A-F	138°C	135+/-2°C	95°C	180°C	5A	250Vac	●		●		●	●	●
P7-5A-F	150°C	145+/-3°C	105°C	180°C	5A	250Vac	●		●		●	●	●
P12-5A-F	145°C	140+/-2°C	102°C	180°C	5A	250Vac					●	●	


Dimension (P-5A-F series)

a	b	c	d	e
11.5±0.5	38±3	Φ0.6±0.02	Φ3.3±0.2	3.6 or below

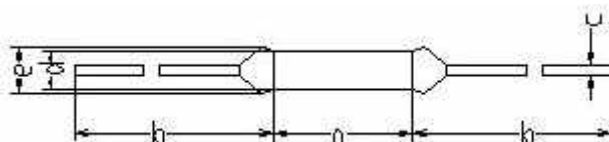


印刷標誌說明


DESCRIPTION OF PRINTING MARKING




A-1A-F SERIES




A-F SERIES




A-3A-F SERIES

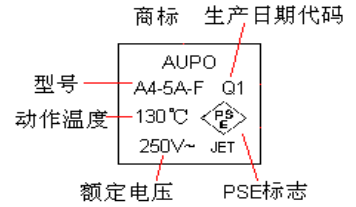

A-5A-F SERIES




P-1A-F SERIES



P-F SERIES



P-3A-F SERIES



P-5A-F SERIES

外箱及每 1,000 粒的塑料袋上會貼上印有 ” 環保 ” 的綠色標貼

